

Supplementary Materials

Microstructural evolution and fatigue mechanism of 316LN austenitic stainless steel welded joint at 4.2 K

Xiaole Gong^{1,2,#}, Jijun Xin^{1,#}, Hengcheng Zhang³, Hongyun Zhao², Mingliang Zhu⁴, Chuanjun Huang³, Fuzhi Shen³, Bingkun Lyu¹, Zhiyuan Liang¹, Wei Wang^{1,2}, Laifeng Li^{1,3}

¹Songshan Lake Materials Laboratory, Dongguan 523808, Guangdong, China.

²China Nonferrous Metals Innovation Institute (Tianjin) Co., LTD., Tianjin 300000, China.

³Key Laboratory of Cryogenics, Technical Institute of Physics and Chemistry, Chinese Academy of Sciences, Beijing 100190, China.

⁴Key Laboratory of Pressure Systems and Safety, Ministry of Education, School of Mechanical and Power Engineering, East China University of Science and Technology, Shanghai 200237, China.

[#]These authors contributed equally to this work.

Correspondence to: Prof. Zhiyuan Liang, Prof. Wei Wang, Songshan Lake Materials Laboratory, Dongguan 523808, Guangdong, China. E-mail: liangzhiyuan@sslslab.org.cn; wangwei@sslslab.org.cn

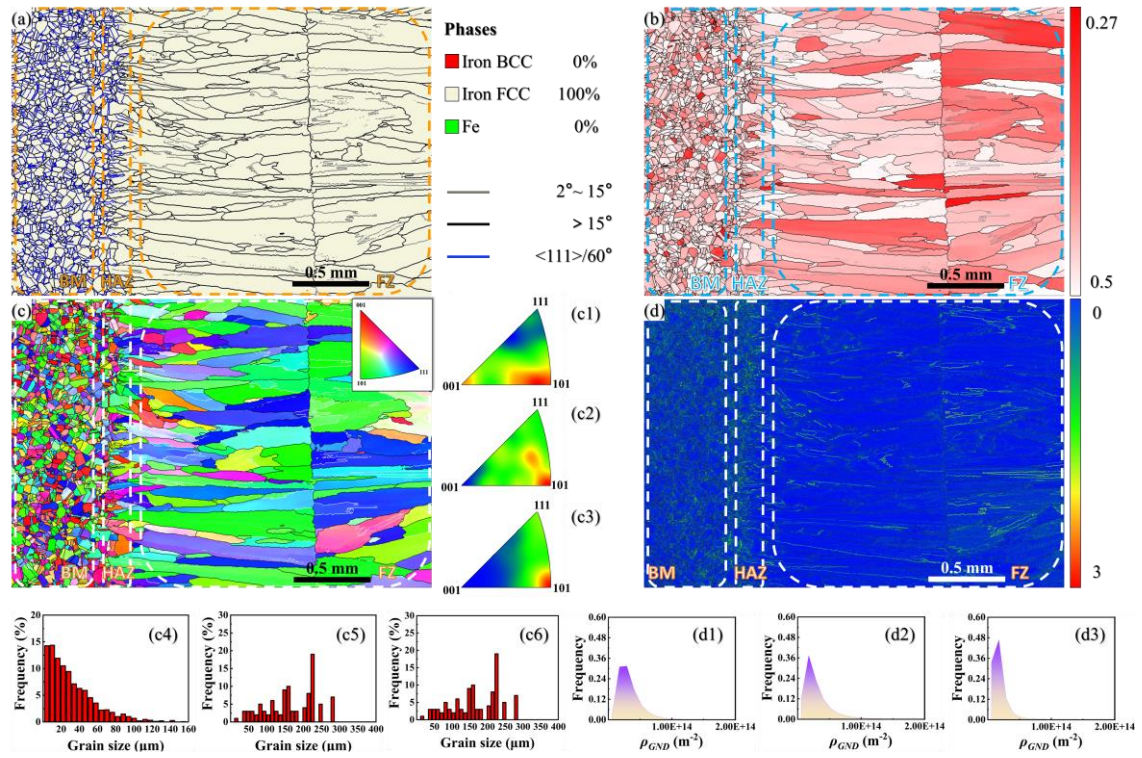


Fig. S1. Microstructure before the fatigue test: (a) Phases map, (b) Schmid factor map, (c-c3) inverse pole figures, (c4-c6) grain size statistical diagrams, (d) Kernel average misorientation map, and (d1-d3) Frequency-Average misorientation diagrams of the initial welded joint.